



Purpose

This document will describe how to use the Deadpool feature in Nagios XI.

Target Audience

This document is intended for use by Nagios XI Administrators who want XI to automatically remove or disable failed hosts and/or services from the Nagios monitoring configuration.

How To Enable and Configure Deadpool Settings

Using the top menu bar, navigate to **Admin > Monitoring Config > Deadpool Settings** (this opens the General Settings tab).

To enable the deadpool processor, click the **Enable the deadpool processor** checkbox. Optionally, you can choose to remove performance data when a host or service is deleted and send email notifications of deadpool activity. Enter a valid email address in the **Email Recipients** field. Email notifications will be sent when the host or service has been added to the deadpool or when they have been deactivated/deleted from the Nagios XI config.

Host and Service Settings

There are two tabs; **Host Settings** and **Service Settings**. The settings for for both tabs are almost identical, in the following information the term object refers to either a host object or service object.

General Settings **Host Settings** Service Settings

The settings below determine when hosts are moved to the deadpool and eventually deleted.

Stage 1 Time: days hours minutes
The amount of time a host must be in a problem state before notifications for it are automatically disabled and it is added to the host deadpool.

Stage 2 Time: days hours minutes
The amount of time a host must be in a problem state before it is automatically removed from the host deadpool and deleted or deactivate from the monitoring configuration.

Stage 2 Action:
The action you'd like the deadpool processor to take once it reaches stage 2 time.

Exclusion Filters:

Names of hosts that should be excluded from deadpool processing. May contain exact string matches or regular expressions. One filter per line.

General Settings Host Settings **Service Settings**

The settings below determine when services are moved to the deadpool and eventually deleted.

Stage 1 Time: days hours minutes
The amount of time a service must be in a problem state before notifications for it are automatically disabled and it is added to the service deadpool.

Stage 2 Time: days hours minutes
The amount of time a service must be in a problem state before it is automatically removed from the service deadpool and deleted or deactivate from the monitoring configuration.

Stage 2 Action:
The action you'd like the deadpool processor to take once it reaches stage 2 time.

Exclusion Filters:

Names of services that should be excluded from deadpool processing. May contain exact string matches or regular expressions. One filter per line.

Stage 1 determines how long an object must be in a problem state before notifications are disabled and the object is added to the deadpool.

Stage 2 determines how long an object must be in a problem state before it is automatically removed from the deadpool and deleted/deactivated from the monitoring configuration.

Stage 2 Action allows you to define if you want an object to be **deleted** or **deactivated** when it reaches stage 2.

Exclusion Filters are used to exclude objects from the settings above. Exact string matches or [PRCE regular expressions](#) can be used.

Behavior and Exclusion

Problem states are “DOWN” for hosts and “CRITICAL” or “UNKNOWN” for services.

A host or service must meet the first stage 1 criteria before the second criteria (deletion time) is evaluated and the deletion time must be at least 5 minutes greater than stage 1 time.

The deletion time setting evaluates the total amount of time a host or service has been in a problem state. In the example above, a service would be moved to the service deadpool after 1 day of being unreachable and removed from the Nagios monitoring configuration after 3 days.

Deadpool does not work retroactively. For example, if a service has already been down for 4 days and then deadpool is activated with its default setting to delete after 3 days, the service will not be deleted.

Regex expressions like `\w`, `\d`, `\s`, can be used but the backslash character must be escaped first. To do this, simply add another backslash to the beginning of the the expression.

For example:

```
/\w*/
```

would become:

```
/\\w*/
```

Here is an example of a Host Exclusion Filter where the hosts 192.168.1.1 to 192.168.1.30 are being excluded. The regex expression will only be matched against the name of the host object, not the address.

**Exclusion
Filters:**

```
localhost
/^192\.168\.1\.([1-9][1-2][0-9]30)$/
```

Here is an example of a Service Exclusion Filter where any service with HTTP is being excluded. The second line is a regex example that excludes SSH and FTP, these could be separate lines but it's here to demonstrate regex.

Exclusion
Filters:


```
HTTP
/SSH|FTP/
```

Regex should be used with some caution as expressions can be written in ways that require a long time to evaluate or may never finish evaluating. If you're not familiar with PCRE regex, a good resource is <http://php.net/manual/en/book.pcre.php>. Many online regex testers are also available. A good one is at <https://regex101.com/>.

How To Check Hosts And Services That Have Been Moved To A Deadpool

As soon as a host or service meets the stage 1 time criteria, Nagios XI will create a new hostgroup or servicegroup called `host-deadpool` or `service-deadpool`. All hosts and services that meet the stage 1 time criteria will be moved to the respective group.

The current status of the host deadpool can be seen by navigating to **Home > Details > Hostgroup Summary**.

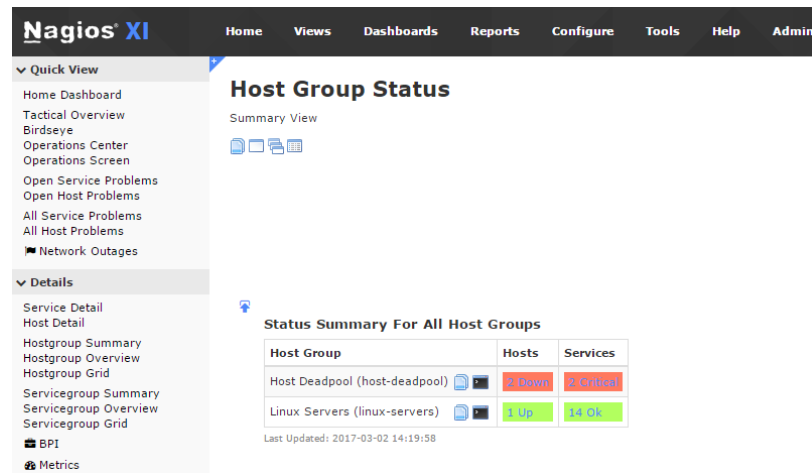

The screenshot shows the Nagios XI interface. The main content area is titled "Host Group Status" and displays a "Summary View" of the status for all host groups. A table provides a quick overview of the status for two host groups: "Host Deadpool (host-deadpool)" and "Linux Servers (linux-servers)".

Host Group	Hosts	Services
Host Deadpool (host-deadpool)	2 Down	2 Critical
Linux Servers (linux-servers)	1 Up	14 Ok

Last Updated: 2017-03-02 14:19:58

The current status of the service deadpool can be seen by navigating to **Home > Details > Servicegroup Summary**.

Service Group	Hosts	Services
Service Deadpool (service-deadpool)	2 Up	2 Critical

Last Updated: 2017-03-02 12:16:29

Details regarding the hosts and services that have been moved into deadpools can be gathered by clicking the links found in the **Status Summary** tables.

Troubleshooting

Host and service check failures are logged to `/var/log/messages` and `/usr/local/nagios/var/nagios.log`.

Deadpool status information is logged to `/usr/local/nagiosxi/var/deadpool.log`. This file is rewritten each time `deadpool.php` is run, which is currently every minute. It will contain the the current status of the deadpool including stage 1 and stage 2(deletion) settings, what hosts or services are currently in the dead pool, and when notification and deletions occur. You can watch the log file by executing the following command in a terminal session on your Nagios XI server:

```
tail -f /usr/local/nagiosxi/var/deadpool.log
```

Host and services can be removed from their respective deadpool groups manually through the CCM. To access this, navigate to **Configure > Core Config Manager** and then select either **Host Groups** or **Service Groups** under the **Monitoring** menu.

Finishing Up

This completes the documentation on how to use the Deadpool feature in Nagios XI.

If you have additional questions or other support related questions, please visit us at our Nagios Support Forums:

<https://support.nagios.com/forum>

The Nagios Support Knowledgebase is also a great support resource:

<https://support.nagios.com/kb>