

How to Maximize Performance in Nagios XI 2024

Purpose

This document describes how to maximize the performance of your Nagios XI server in a non-distributed environment to increase the overall efficiency of the monitoring server. This document will cover the primary causes of performance degradation and look at some possible solutions to maximize the use of your Nagios XI server. Specifically, it will discuss maximizing active checks on a single Nagios XI server.

Summary

Nagios XI has several key factors that determine system performance. An administrator should have a solid understanding as to what is affecting their system's performance.

There can be a lot of factors to consider because of the flexibility of Nagios XI.

This document will cover the primary causes of performance degradation and look at some possible solutions to maximize the use of your Nagios XI server without having to resort to advanced system configurations

Key Factors that Affect Nagios XI's Performance

- Check Load = Total number of hosts + services.
- Check Interval = How often the checks are running
- Host and Service Latencies = The amount of time a check lags behind its scheduled check time
- AJAX updates in Nagios XI's web interface
- Database Activity
- Subsystem Processes
- Disk I/O and Using RAM Disks

This document is based largely on a set of benchmark tests run on a **3gz Single Core system** with 3.5GB of RAM. Most of the examples in this document will be based on that test environment.

Maximizing Performance: The Basic Formula

The check load of your monitoring environment is made up from the total number of active checks being run on your Nagios XI server (hosts + services). This number can range from hundreds to thousands depending on your monitoring environment.

How to Maximize Performance in Nagios XI 2024

The bottom line regarding active checks is: How many checks can your system handle per second?

This number cannot be determined without considering your average check interval for all of your hosts and services. In Nagios XI, the default check interval is typically 5 minutes.

If you create thousands of checks in XI without ever adjusting this number on any of your checks, then all of your checks will be happening within a 5-minute window. This can quickly push your CPU very hard and limit the max number of checks that your machine can handle.

Additional things that can affect the performance of your monitoring solution include:

- Disk I/O subsystem performance
- The use of a ram disk for decreasing I/O for checks results and performance graphs
- The placement of database servers
- The use of CPU intensive checks (SNMP, check_esx3.pl, and custom plugins)
- The use of passive vs. active checks
- How many users are accessing the monitoring system

Benchmark Tests

In our benchmark example, we ran a test with roughly 5200 checks (mostly PING, HTTP, DNS Res, and DNS IP) within a 10-minute interval on our single core machine.

```
Check Load = 5220
Check Interval = 10 minutes
5220 / 10 / 60 seconds = 8.6 checks per second
Average CPU Load = 8.0 - 12.0
Host/Service Latencies = < 2.0 seconds
```

With these settings the system was still usable, but it was sluggish and not optimal for regular use. The host and service latencies were generally under 2 seconds, which was high and indicated that the system could quickly become overtaxed with the average load running that high.

How to Maximize Performance in Nagios XI 2024

Default reaper settings

```
check_result_reaper_frequency=10
max_check_result_reaper_time=30
Modified reaper setting for a high check volume:
check_result_reaper_frequency=3
max_check_result_reaper_time=10
```

















Once we modified the reaper setting, we were able to bring the average check interval back down to 5 minutes with these results.

```
Check Load = 5220
Check Interval = 5 minutes
5220 / 5 / 60 seconds = 17.4 checks per second
```

```
Average CPU Load = 5.0 - 9.0
Host/Service Latencies = ~ 0.5 seconds
```

Even with the check volume doubled, the page load times improved, and although the CPU is being pushed, the XI interface can be actively used without the check latencies increasing and the check schedule from falling behind.

It should be noted that as the total number of checks increases past 5000, the max possible checks per second will decrease due to the Core monitoring engine having to work harder to maintain the check schedule. At 10000 checks, the maximum checks per second with any check interval on the benchmark test was around 13 checks per second.

Metric	Value
Load	
1-min	0.49 
5-min	0.29 
15-min	0.26 
CPU Stats	
User	2.39% 
Nice	0.00% 
System	0.88% 
I/O Wait	0.10% 
Steal	0.00% 
Idle	96.63% 
Memory	
Total	7894 MB
Used	2227 MB 
Free	4640 MB 
Shared	29 MB 
Buffers	1319 MB 
Cached	5666 MB 
Swap	
Total	4095 MB
Used	0 MB 
Free	4095 MB 

Last Updated: 2024-12-01 23:21:05

Nagios XI Performance Settings

One of the key differences between the Nagios XI interface and the Nagios Core CGIs is the AJAX updates that are performed in Nagios XI. Nagios XI grabs XML data from the backend via AJAX requests in order to keep the data in your browser window up to date without have to reload the page.

The challenge this creates for system performance is that opening multiple browser windows to Nagios XI will have a dramatic increase in your system load. For every browser opened to Nagios XI, an additional set of AJAX calls are being made to the server for fresh data.

How to Maximize Performance in Nagios XI 2024

In order to reduce the load related to AJAX calls, Nagios XI allows you to use nonAJAX pages for various screens in its web UI. These settings can be adjusted in the latest version of Nagios XI by accessing the **Admin > System Config > Performance Settings** page. If you're running a high number of checks (5000+) or your CPU load is consistently high, there are a few adjustments you can make that may improve performance. These are described below in more detail.

Performance Settings: Pages

Use unified dashboards to decrease the number of AJAX calls to the server. The unified tactical overview makes only one call to the server every 90 seconds and will noticeably decrease your CPU load.

Performance Settings

?

☆

Pages

Dashlets

Databases

Subsystem

Auto-Running

Backend Cache

Snapshots

PDF Exporting

These options allow you to select which pages are used in the Nagios XI web interface.

Non-unified pages provide dynamic updates via Ajax and let users add certain sections of the page to their dashboards, but incur a higher performance hit than unified pages. Unified pages offer higher performance than non-unified pages, but do not offer users the ability to add portions of the page to their dashboards.

Page Settings

☐

Use Unified Tactical Overview

☐

Use Unified Hostgroup Screens

☐

Use Unified Servicegroup Screens

Status Page Settings

Object status retries:

6

Number of times to retry before showing object does not exist message in host/service status pages. One retry per second.


Update Settings

Cancel

How to Maximize Performance in Nagios XI 2024

Performance Settings: Dashlets

To globally adjust the refresh rate of all of your dashlets, increase the **Dashlet Refresh Multiplier**. The default value for this is 1000ms (1 second). You can also increase the refresh time for specific dashlets as needed in order to fine tune the performance to meet the needs of your monitoring environment (not all shown below).

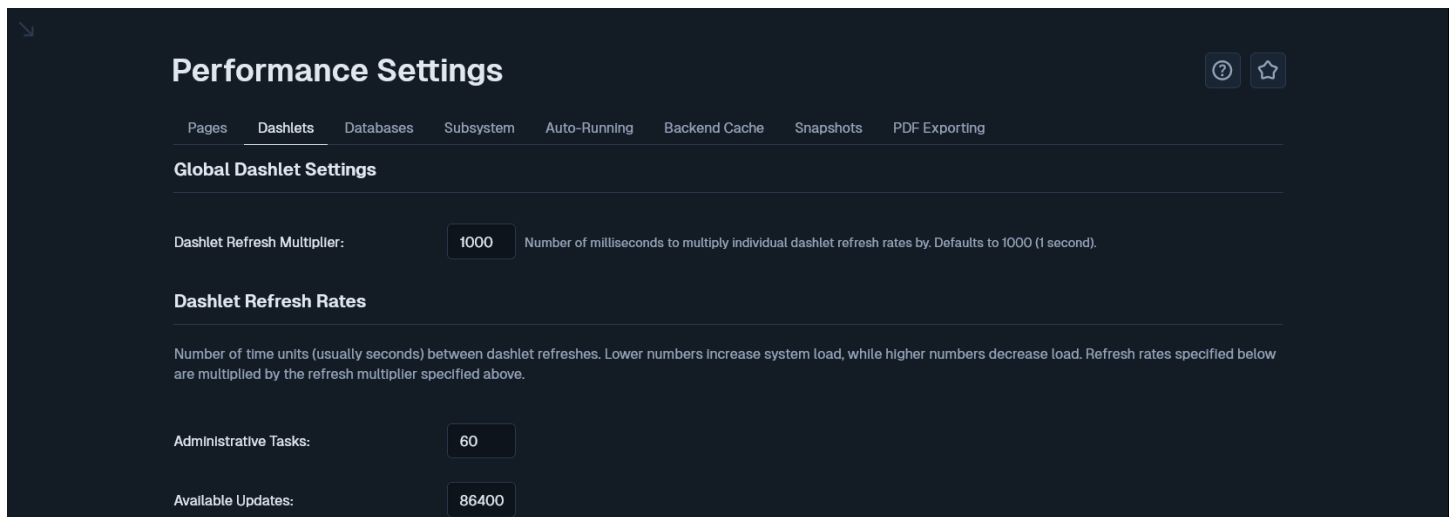

The screenshot shows the 'Performance Settings' page in Nagios XI, with the 'Dashlets' tab selected. The page has a dark theme. At the top, there are tabs for 'Pages', 'Dashlets', 'Databases', 'Subsystem', 'Auto-Running', 'Backend Cache', 'Snapshots', and 'PDF Exporting'. Below the tabs, the 'Global Dashlet Settings' section is visible. It contains a 'Dashlet Refresh Multiplier' input field set to '1000' with a description: 'Number of milliseconds to multiply individual dashlet refresh rates by. Defaults to 1000 (1 second)'. Below this is the 'Dashlet Refresh Rates' section, which includes a description: 'Number of time units (usually seconds) between dashlet refreshes. Lower numbers increase system load, while higher numbers decrease load. Refresh rates specified below are multiplied by the refresh multiplier specified above.' At the bottom, there are two more input fields: 'Administrative Tasks' set to '60' and 'Available Updates' set to '86400'.

Performance Settings: Databases

Database optimization for Nagios XI is a larger topic, and is covered in more detail in the following document:

[Nagios XI Database Optimization](#)

Performance Settings: Subsystem

Nagios XI relies on several subsystem processes that run on a continual basis. Changing these settings can result in a slight decrease in CPU usage. These settings have a more pronounced effect on larger systems.

Disabling **Outbound Data Transfers** and listening for **Unconfigured Objects** will result in a slight decrease in CPU usage, and disabling subsystem logging will reduce Nagios XI's subsystem logging to a minimum and will reduce disk activity and CPU for most subsystem processes. This can help

How to Maximize Performance in Nagios XI 2024

reduce system usage during larger outages where many event handlers and notifications are being issued.

Performance Settings

?

☆

Pages

Dashlets

Databases

Subsystem

Auto-Running

Backend Cache

Snapshots

PDF Exporting

These options allow you to enable/disable certain ongoing subsystem processes of Nagios XI.

Disabling Outbound Data Transfers and listening for Unconfigured Objects will result in a slight decrease in CPU usage, and disabling subsystem logging will reduce disk activity for subsystem processes. **NOTE:** Disabling Outbound Transfers will stop any currently defined outbound transfers. Outbound settings can be viewed [here](#).

Subsystem Options

☐

Enable Outbound Data Transfers

☒

Enable Listener For Unconfigured Objects

☒

Enable Subsystem Logging

☒

Enable BPI sync on Apply Config (this option can also be changed in the [BPI settings page](#))

BPI Sync NDO Startup Timeout:

120

Amount of seconds to wait for NDO to startup when syncing BPI after apply config.

Update Settings

Cancel

How to Maximize Performance in Nagios XI 2024

Performance Settings: Auto-Running

By default, when you visit a **Report** or view the **Metrics** page (via **Home > Details > Metrics**), the report or metric will automatically be generated. This can cause some considerable delays on larger Nagios XI systems.

These options allow you to disable the automatic running of the reports and metrics. If the appropriate box is checked, the report or metric will not be run until the Update button is pressed. This gives you time to select which hosts, services, or groups you wish to include before the action is taken.

Performance Settings

?

☆

Pages

Dashlets

Databases

Subsystem

Auto-Running

Backend Cache

Snapshots

PDF Exporting

Edit performance settings for auto-running pages such as reports, metrics, etc.

Auto-running Page Performance Options

☐ Disable reports from automatically running on page load

☐ Disable metrics from loading on page load

Update Settings

Cancel

How to Maximize Performance in Nagios XI 2024

Performance Settings: Backend Cache

Performance Settings

[Pages](#) [Dashlets](#) [Databases](#) [Subsystem](#) [Auto-Running](#) [Backend Cache](#) [Snapshots](#) [PDF Exporting](#)

Edit settings relating to the Backend Cache. This is used to cache some of the calls to the database.

Enabling this feature will result in non-realtime data. If you need data displayed in realtime, then **DO NOT** enable this feature.

- This can considerably improve performance on systems that perform a lot of host and/or service checks.
- Enabling this feature on systems with a lower amount of checks (< 1,000) will be detrimental to performance and is **not recommended**.
- Enabling this feature on systems that add or remove hosts and/or services frequently is **not recommended**.

Backend Cache Settings

Enable Backend Cache

☐

Backend Cache Location

Change the location of the backend cache - just make sure that the new location has write permissions for the apache user

Backend Cache Expiration Time

How long will a particular cache exist? Measured in seconds

Maximum Backend Cache Performance

In order to take full advantage of the Backend Cache, you might want to ensure that your Backend Cache Location is writing to RAM instead of disk. To create a 512 MB RAM Disk to hold the cache data, console in to your Nagios XI server as root, and execute the following command:

```
mount -t tmpfs -o size=512m tmpfs /usr/local/nagiosxi/tmp/backendcache
```

Update Settings

Cancel

This is used to cache some of the calls to the database.

- Enabling this feature will result in non-realtime data. If you need data displayed in realtime, then DO NOT enable this feature.

This can considerably improve performance on systems that perform a lot of host and/or service checks.

How to Maximize Performance in Nagios XI 2024

Performance Settings: Snapshots

Configuration Manager generates snapshots as part of the **Apply Configuration** process. The amount of snapshots you wish to retain can be tuned to your retention requirements.

Performance Settings

?

☆

Pages

Dashlets

Databases

Subsystem

Auto-Running

Backend Cache

Snapshots

PDF Exporting

Select the amount of different kinds of snapshots to keep. You must keep at least the last one good CCM and Core snapshot.

Number of Core Snapshots

10

Number of Error Snapshots

10

Number of CCM Snapshots

10

This must be equal to or greater than the number of Core snapshots


Update Settings

Cancel

How to Maximize Performance in Nagios XI 2024

Performance Settings: PDF Exporting

PDF Exporting is handled by an external process which generated the PDF file and makes it available for download. If your reports don't appear to be rendering correctly, you can try increasing these delays before the PDF is rendered.

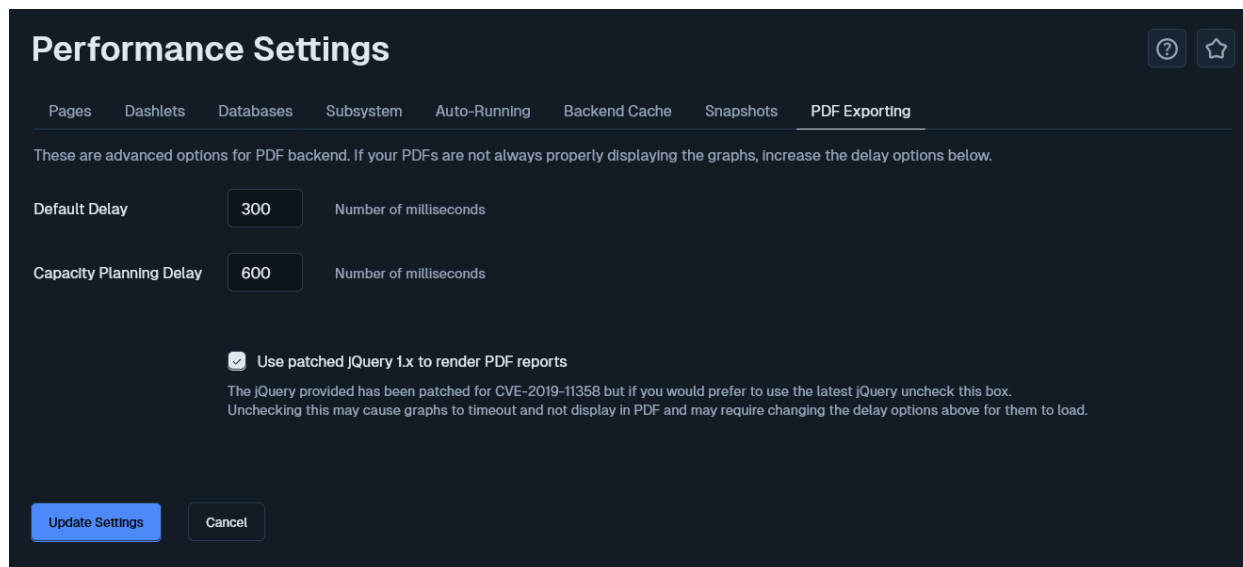

The screenshot shows the 'Performance Settings' page in Nagios XI, specifically the 'PDF Exporting' tab. The page has a dark theme. At the top, there's a navigation bar with tabs: Pages, Dashlets, Databases, Subsystem, Auto-Running, Backend Cache, Snapshots, and PDF Exporting. Below the tabs, a message states: 'These are advanced options for PDF backend. If your PDFs are not always properly displaying the graphs, increase the delay options below.' There are two input fields: 'Default Delay' set to 300 and 'Capacity Planning Delay' set to 600, both with a unit of 'Number of milliseconds'. Below these is a checkbox labeled 'Use patched JQuery 1.x to render PDF reports' which is checked. A note below the checkbox says: 'The JQuery provided has been patched for CVE-2019-11358 but if you would prefer to use the latest JQuery uncheck this box. Unchecking this may cause graphs to timeout and not display in PDF and may require changing the delay options above for them to load.' At the bottom, there are two buttons: 'Update Settings' and 'Cancel'.

Checking Performance

The following metrics can help you determine whether or not your system is able to keep up with the monitoring engine's check schedule:

- Host and service check latencies
- Monitoring engine event queue
- System load

These metrics can be found via **Admin > System Information > Monitoring Engine Status**.

Every CPU has a maximum effective number of checks per second that it will be able to handle. This number will vary based on the number of total checks being run, and what check plugins are being run. Compiled plugins are much more efficient than perl, python, and php (interpreted) plugins, and monitoring switch and router bandwidth also tends to use more CPU than most.

Server Statistics	
Metric	Value
Load	
1-min	0.21 ■
5-min	0.21 ■
15-min	0.23 ■

How to Maximize Performance in Nagios XI 2024


There are several dashlets included with Nagios XI that can be used to watch for overtaxing of your system.

See the examples for other obvious signs of overtaxing your CPU. If your latencies are averaging over 10 seconds on a regular basis, then you either need to increase your average check interval, decrease the number of checks, or add more CPU power.


Note: On overtaxed systems, the Monitoring Engine Event Queue will look extremely weighted on the left side.

The images below provide an example:

- This screenshot shows an overtaxed system that will exhibit high check latencies.

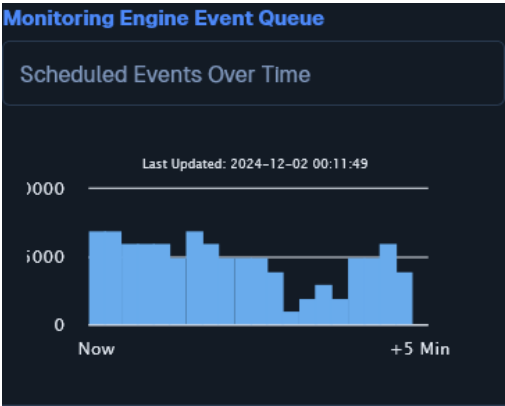

- Right screenshot shows an overtaxed system that will exhibit high check latencies

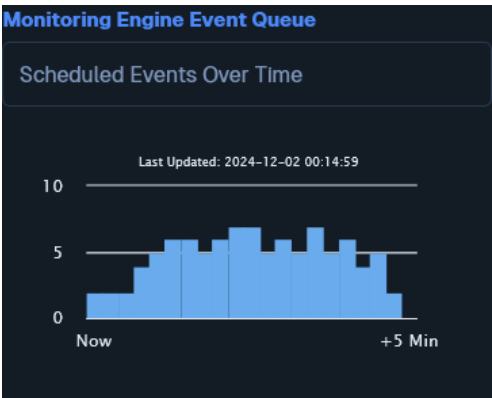

Monitoring Engine Performance	
Metric	Value
Host Check Latency	
Min	0.00 sec
Max	0.01 sec
Avg	0.00 sec
Host Check Execution Time	
Min	0.00 sec
Max	3.09 sec
Avg	0.71 sec
Service Check Latency	
Min	0.00 sec
Max	0.04 sec
Avg	0.00 sec
Service Check Execution Time	
Min	0.00 sec
Max	31.22 sec
Avg	5.18 sec
Last Updated: 2024-12-02 00:03:58	

How to Maximize Performance in Nagios XI 2024

Monitoring Performance Using Nagiostats

The Nagiostats Wizard is a useful tool which will allow you to run checks against your internal Nagios performance and generate performance graphs for the actual program statistics. This can be useful for monitoring check latencies, execution times, and other performance analysis. The Nagiostats Wizard comes included with Nagios XI however if it cannot be found it can be downloaded from the [Nagios Exchange](#).

Utilizing A RAM Disk

Although having enough CPU power on a Nagios server is important, the biggest hardware limitation to a Nagios system is disk I/O. A large Nagios installation creates an enormous amount of disk activity, and if the hard disk can't keep up with the constant traffic flow that needs to happen, even a large number of CPU's are simply going to wait for the disk in order to write new information to the disk. This can cause check latencies to soar even though the CPU usage appears within a safe range. Some users have solved this by using creative file mounts on separate partitions or purchasing extremely fast disks for their servers. The following documentation will cover how to configure Nagios XI with a RAM Disk:

[Utilizing a RAM Disk in Nagios XI](#)

Using rrdcached

The rrdcached collects host and service performance data and then flushes it to the appropriate rrd files at a specified interval. This reduces the amount of disk activity needed to keep a large number of rrd files current for performance graphs.

[Using rrdcached with Nagios XI](#)

How to Maximize Performance in Nagios XI 2024

Additional Options For Improving Performance

You can also look into distributed monitoring options and/or the use of passive checks to improve the performance of your system. These topics are covered in separate documents linked below.

Distributed Monitoring options for Nagios XI:

[How To Implement A Distributed Nagios XI Environment](#)

Passive Checks for Nagios XI:

[How To Configure Inbound Checks With Nagios XI](#)

[How To Configure Passive Services In Nagios XI](#)

[NRDP Overview](#)

Finishing Up

This completes the documentation on maximizing performance in Nagios XI. If you have additional questions or other support-related questions, please visit us at our Nagios Support Forum, Nagios Knowledge Base, or Nagios Library:

[Visit Nagios Support Forum](#)

[Visit Nagios Knowledge Base](#)

[Visit Nagios Library](#)